

FOCUSAUDIO

Since 1993, we have striven to continually research and develop ways to enhance our loudspeaker design and performance. Today, our new generation series team up equally well with traditional two-channel audio reproductions and currently sought-after high definition home theater systems



## Prestige Series SE

Renowned for its superior build quality and sonic reproduction, our Prestige Series is at the apex of speaker design. We used Nomex/Kevlar Hexacone mid-range and bass drivers made by Eton of Germany for Focus Audio, and individually selected silk dome Illuminator tweeters from Danish ScanSpeak. Inside the solidly

sculpted cabinet finished with multilayer high-gloss piano black, we optimized our crossovers to give the smoothest transitions and harmonic balances between drivers. Each loudspeaker undergoes rigorous quality control measurement and listening tests to give you the ultimate perfection in sound.

Specification	FPC SE	FP-50 SE	FP-60 SE	FP-70 SE	FP-80 SE	FP-88 SE	FP-90 SE
Frequency Response	45 Hz-25 kHz $\pm$ 3dB	45 Hz-25 kHz $\pm$ 3dB	40 Hz-25 kHz $\pm$ 3dB	35 Hz-25 kHz $\pm$ 3dB	40 Hz-25 kHz $\pm$ 3dB	30 Hz-25 kHz $\pm$ 3dB	25 Hz-25 kHz $\pm$ 3dB
Sensitivity	90 dB / 1 W / 1 m	85 dB / 1 W / 1 m	86 dB / 1 W / 1 m	86 dB / 1 W / 1 m	90 dB / 1 W / 1 m	90 dB / 1 W / 1 m	87 dB / 1 W / 1 m
Impedance	4 $\Omega$	8 $\Omega$	8 $\Omega$	8 $\Omega$	4 $\Omega$	4 $\Omega$	8 $\Omega$
Recommended Power	20 - 300 W	20 - 300 W	20 - 300 W	20 - 300 W	20 - 500 W	20 - 500 W	50 - 500 W
Tweeter (Silk dome AirCirc magnet)	1"	1"	1"	1"	1"	1"	1"
Midrange (Nomex / Kevlar Hexacone)							5.5"
Woofer (Nomex / Kevlar Hexacone)	2x5.5"	5.5"	7"	7"	2x5.5"	2x7"	9"
Size (HxWxD)	7.5"x22.5"x10"	13"x7"x10"	17"x8"x12"	38"x8"x10"	38"x7.5"x10"	43"x8"x13"	43"x9.5"x15.5"
Weight	Net weight 28 lbs each	Net weight 19 lbs each	Net weight 28 lbs each	Net weight 55 lbs each	Net weight 50 lbs each	Net weight 70 lbs each	Net weight 88 lbs each

## Signature Series SE

For years, our Signature Series has continually surpassed the borders of artistic expression in loudspeaker design. Luxuriate in the wonder, majesty, and soul of the original performance in all its glory. Now, we bring you the most recently evolved forms of the Signature Series, adjusted to complement both two-channel audio and high-definition home theater systems. The Danish designed drivers are seamlessly matched with premium grade crossover components and housed in

elegantly handcrafted piano finished cabinets. We'll bring you closer to live music than anything else in your home.



Specification	FSC-1 SE	FS-6 SE	FS-7 SE	FS-8 SE	FS-9 SE
Frequency Response	45 Hz-25 kHz $\pm$ 3dB	45 Hz-25 kHz $\pm$ 3dB	35 Hz-25 kHz $\pm$ 3dB	40 Hz-25 kHz $\pm$ 3dB	35 Hz-25 kHz $\pm$ 3dB
Sensitivity	91 dB / 1 W / 1 m	86 dB / 1 W / 1 m	86 dB / 1 W / 1 m	91 dB / 1 W / 1 m	91 dB / 1 W / 1 m
Impedance	4 $\Omega$	8 $\Omega$	8 $\Omega$	4 $\Omega$	4 $\Omega$
Recommended Power	20-300 W	20-200 W	20-300 W	20-300 W	20-500 W
Tweeter (Silk dome)	1"	1"	1"	1"	1"
Woofer (Aluminum HDS Cone)	2x5.5"	5.5"	7"	2x5.5"	2x7"
Size (HxWxD)	7.5"x22.5"x10"	13"x7"x10"	38"x8"x10"	38"x7.5"x10"	43"x8"x13"
Weight	Net weight 28 lbs each	Net weight 19 lbs each	Net weight 50 lbs each	Net weight 50 lbs each	Net weight 70 lbs each




## Signature68LE

Beloved by audiophiles across the world, our model FS68 LE remains a legend in audio reproduction. Our flawless handcraft and life-like musicality give the audience an unforgettable sonic experience.



Specification	FSC1 SE	FC6 SE	FC7 SE	FC8 SE	FC9 SE
Frequency Response	45 Hz - 25 kHz $\pm$ 3dB	45 Hz - 25 kHz $\pm$ 3dB	35 Hz - 25 kHz $\pm$ 3dB	40 Hz - 25 kHz $\pm$ 3dB	35 Hz - 25 kHz $\pm$ 3dB
Sensitivity	85 dB/1 W/1 m	86 dB / 1 W / 1 m	86 dB / 1 W / 1 m	91 dB / 1 W / 1 m	91 dB / 1 W / 1 m
Impedance	Nominal 8 Ohms	8 $\Omega$	8 $\Omega$	4 $\Omega$	4 $\Omega$
Recommended Power	20 - 200 W	20 - 200 W	20 - 300 W	20 - 300 W	20 - 500 W
Drivers	One- 1-1/8" Silk dome ferrofluid cooled tweeter One- 5-1/2" Nomex/Kevlar Hexacone woofer with phase plug and polymer voicing coating				
Termination	Cardas gold plated binding posts				
Size	13" x 7" x 10" (H x W x D)				
Weight	Net weight 20 lbs each	Net weight 18 lbs each	Net weight 48 lbs each	Net weight 48 lbs each	Net weight 68 lbs each

Selected audiophile grade drivers and components

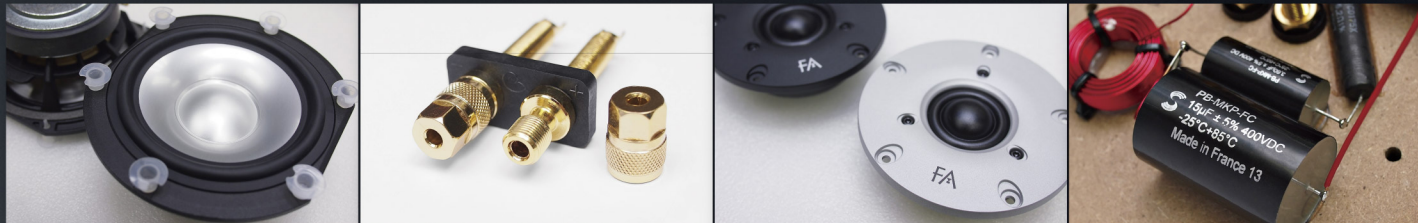

## Classic Series SE

With our cutting-edge technology, rigorous listening tests and precise tuning process, our Classic Series loudspeaker designs surpass the performance standards of the most discerning speaker designers and

audiophiles. We exceed our own expectations every time as we bring out each essential element in music reproduction.

Specification	FCC1 SE	FC6 SE	FC7 SE	FC8 SE	FC9 SE
Frequency Response	45 Hz - 25 kHz $\pm$ 3dB	45 Hz - 25 kHz $\pm$ 3dB	35 Hz - 25 kHz $\pm$ 3dB	40 Hz - 25 kHz $\pm$ 3dB	35 Hz - 25 kHz $\pm$ 3dB
Sensitivity	91 dB / 1 W / 1 m	86 dB / 1 W / 1 m	86 dB / 1 W / 1 m	91 dB / 1 W / 1 m	91 dB / 1 W / 1 m
Impedance	4 $\Omega$	8 $\Omega$	8 $\Omega$	4 $\Omega$	4 $\Omega$
Recommended Power	20 - 300 W	20 - 200 W	20 - 300 W	20 - 300 W	20 - 500 W
Tweeter (Silkdome)	1"	1"	1"	1"	1"
Woofer (Glass fibre Composite Cone)	2x5.5"	5.5"	7"	2x5.5"	2x7"
Size (HxWxD):	6.5"x20"x10"	13"x7"x10"	38"x8"x10"	38"x7.5"x10"	43"x8"x13"
Weight	Net weight 20 lbs each	Net weight 18 lbs each	Net weight 48 lbs each	Net weight 48 lbs each	Net weight 68 lbs each